
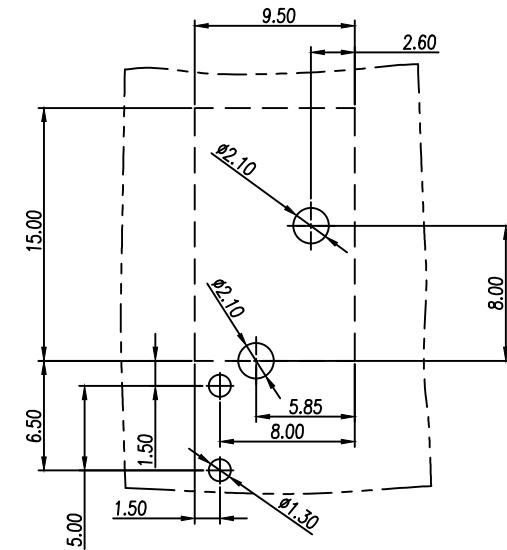
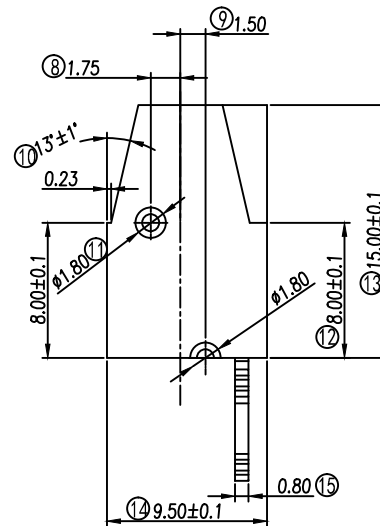
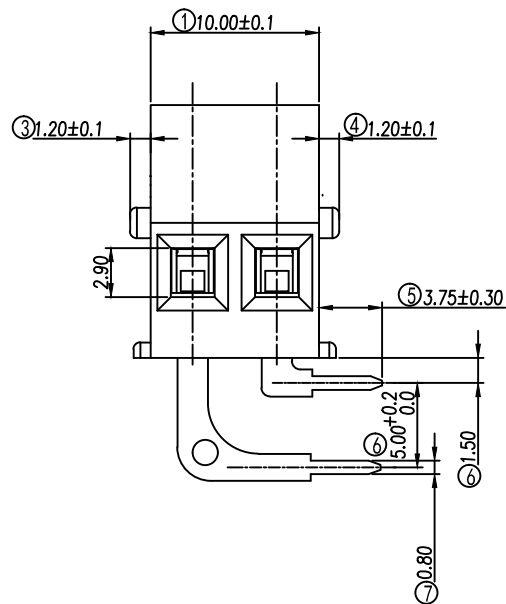


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	新发行		

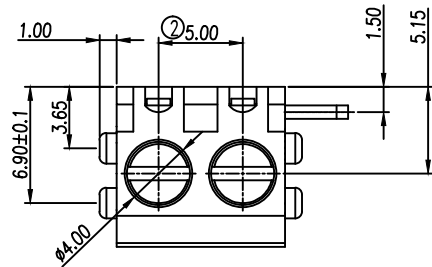

NOTES:

1. Voltage Rating: 250V, Current Rating: 15A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40° C ~ +105° C
5. Suitable Electric Wire: 26-12AWG
6. Screw Torque Value: 0.5Nm

技术要求:

1. 额定电压: 250V, 额定电流: 15A
2. 间距: 5.0mm
3. 耐电压值: AC 2500V/min
4. 使用条件: -40° - +105°
5. 适用线规: 26-12AWG
6. 螺丝扭力: 0.5Nm

	pitch dimension			Naminl dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC1-5.08螺丝 (一字平头)	SPOYA255301V	2	碳钢	三价铬钝化彩锌
4	LC1-5.08铜方块	F1A0BLG1283V	2	黄铜	镀镍
3	LGV3A-5.0-中焊脚	LGV3A-5.0-中焊脚	1	黄铜	镀雾锡
2	LGV3A-5.0-小焊脚	LGV3A-5.0-小焊脚	1	黄铜	镀雾锡
1	LGAKD-5.0-主体 (M3孔)	LGAKD-5.0-主体 (M3孔)	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 2026/09/01	UNITS	MM	THIRD ANGLE PROJECTION SHEET
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-2030001 REV:V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LGAKDR-5.0-2P-1Y-00A-右脚 (M3) LGAKDR-5.0-成品