
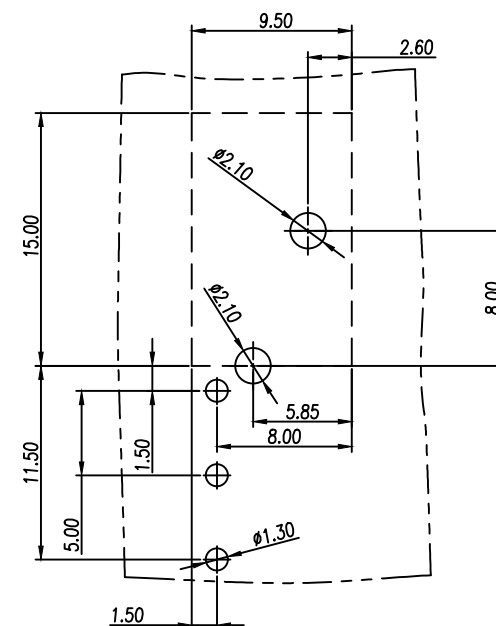
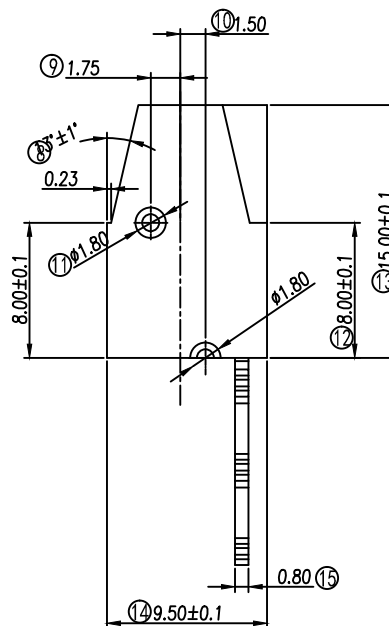


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	新发行		

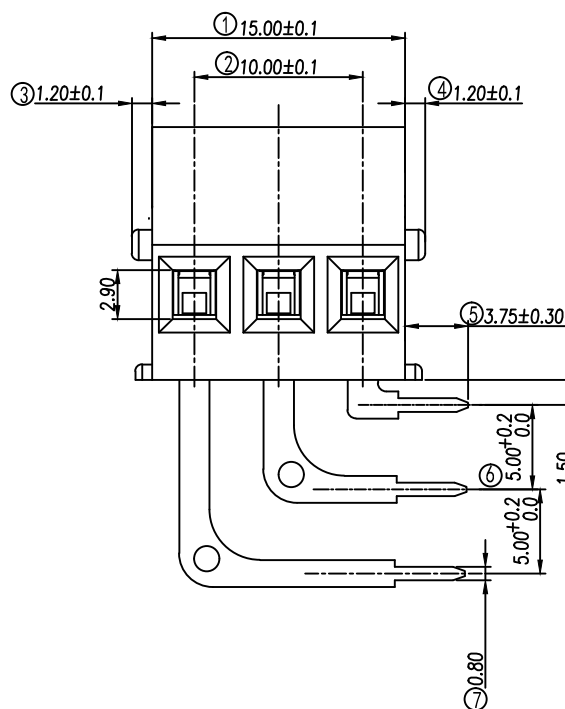

NOTES:

1. Voltage Rating: 250V, Current Rating: 15A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
5. Suitable Electric Wire: 26-12AWG
6. Screw Torque Value: 0.5Nm

技术要求:

1. 额定电压: 250V, 额定电流: 15A
2. 间距: 5.0mm
3. 耐电压值: AC 2500V/min
4. 使用条件: $-40^{\circ} - +105^{\circ}$
5. 适用线规: 26-12AWG
6. 螺丝扭力: 0.5Nm

	pitch dimension			Nominal dimension					—
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LC1-5. 08螺丝 (一字平头)		SPOYA255301V		3	碳钢	三价铬钝化彩锌	
7	LC1-5. 08铜方块		F1A0BLCS083V		3	黄铜	镀镍	
4	LGV3A-5. 0-大焊脚		LGV3A-5. 0-大焊脚		1	黄铜	镀雾锡	
3	LGV3A-5. 0-中焊脚		LGV3A-5. 0-中焊脚		1	黄铜	镀雾锡	
2	LGV3A-5. 0-小焊脚		LGV3A-5. 0-小焊脚		1	黄铜	镀雾锡	
1	LGAKD-5. 0-主体 (M3孔)		LGAKD-5. 0-主体 (M3孔)		1	PA66		
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DES.	CMZ	DATE	2026/09/01	UNITS	MM	THIRD ANGLE PROJECTION 		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-2030001	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE		LGAKDR-5. 0-3P-1Y-00A-右臂 (M
								LGAKDR-5. 0-成品