
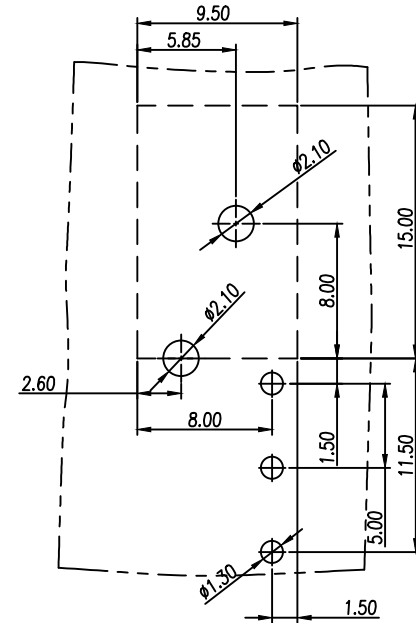
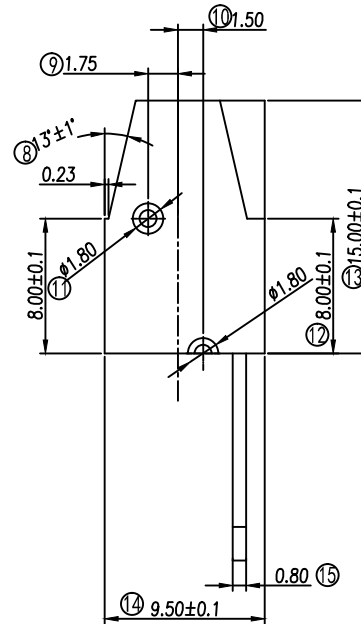
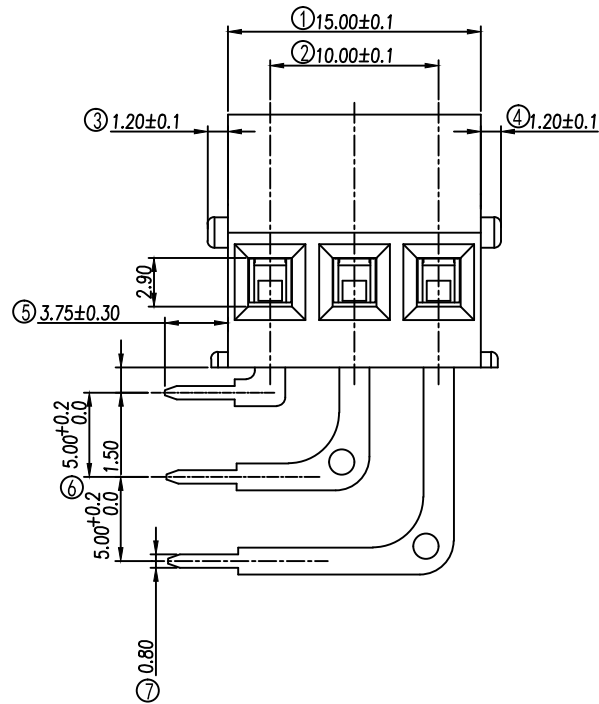


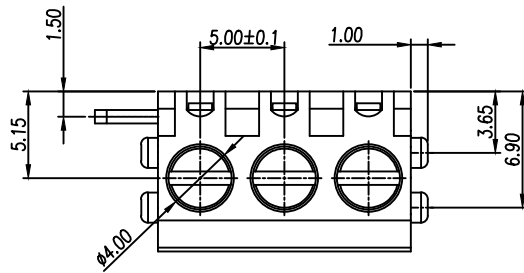

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	新发行		

NOTES:

1. Voltage Rating: 250V, Current Rating: 15A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40° C ~ +105° C
5. Suitable Electric Wire: 26-12AWG
6. Screw Torque Value: 0.5Nm

技术要求:

1. 额定电压: 250V, 额定电流: 15A
2. 间距: 5.0mm
3. 耐电压值: AC 2500V/min
4. 使用条件: -40° - +105°
5. 适用线规: 26-12AWG
6. 螺丝扭力: 0.5Nm

	pitch dimension			Naminl dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LC1-5.08螺丝 (一字平头)		SPOYA255301V		3	碳钢	三价铬钝化彩锌	
5	LC1-5.08铜方块		F1A0BLG1283V		3	黄铜	镀镍	
4	LGV3A-5.0-大焊脚		LGV3A-5.0-大焊脚		1	黄铜	镀雾锡	
3	LGV3A-5.0-中焊脚		LGV3A-5.0-中焊脚		1	黄铜	镀雾锡	
2	LGV3A-5.0-小焊脚		LGV3A-5.0-小焊脚		1	黄铜	镀雾锡	
1	LGAKD-5.0-主体 (M3孔)		LGAKD-5.0-主体 (M3孔)		1	PA66		
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DES.	CMZ	DATE	2026/09/01	UNITS	MM	THIRD ANGLE PROJECTION		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-2030001	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE	LGAKDL-5.0-3P-1Y-00A-左脚 (M3)	
							LGAKDL-5.0-成品	